

# DIAMOND<>FURR® Pat.

## LATH ATTACHMENT SYSTEM

PRODUCT ID: **DFS-375**

**PLASTER STOP**



**DESCRIPTION:** The Diamond-Furr *Plaster Stop* has a unique and patented design that offers the first real solution to the moisture intrusion problems that have plagued the plastering industry for decades.

The Diamond-Furr *Plaster Stop* (pt# DFS-375) is designed to be used in a 3-coat plaster system just like a conventional casing bead at termination points such as doors and windows. The Diamond-Furr difference is the built-in furring strip which provides an uninterrupted 3/8" furring as well as a flexible connection point for metal lath. The tie wire connection effectively eliminates 100% of the fastener penetrations through the moisture barrier at these critical points. It also means that the lath never comes in contact with the moisture barrier which removes the probability of accidental tears, by over tightened screws in the last line of defense against moisture intrusion.

Another advantage of the Diamond-Furr *Plaster Stop* is that it removes the need for additional petroleum based peel and stick moisture barrier products which allows the plaster at the termination point to reach the full 7/8" depth.

We recommend using the Diamond-Furr Termination Trims in conjunction with our ICC approved (ESR-3232) Diamond-Furr *Furring Strips* for a complete system and the utmost protection against moisture intrusion.

**MATERIAL:** 26 GA Galvanized Steel G90, Also available in Stainless Steel – Call for Details  
**ASTM :** A653, LFQ, C1063, C841, C847, A653, C1047, A924, Fed. Spec QQ-S-775-D  
**LENGTH:** Standard: 10 ft.

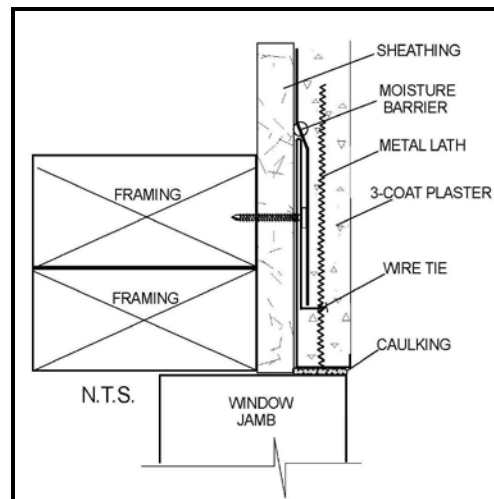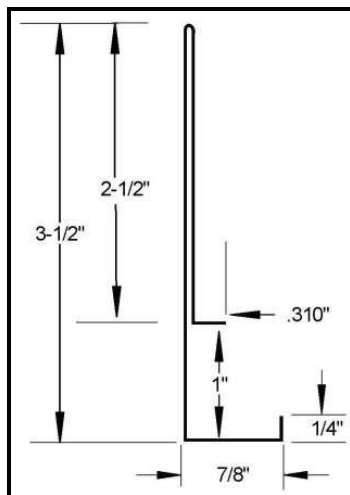

**BRAND X METALS, INC.**

1641 So. Sinclair Street ♦ Anaheim, CA 92806 ♦ PH: (714) 978-3600 ♦ FAX: (714) 978-3601

[www.brandxmetals.com](http://www.brandxmetals.com)