

DIAMOND<>FURR® Pat.

LATH ATTACHMENT SYSTEM

PRODUCT ID: **DFXS-375**

EXPANSION JOINT


DESCRIPTION: The Diamond-Furr *Lath Attachment System* is a unique patent pending design that offers the first real solution to the moisture intrusion problems that have plagued the plastering industry for decades.

The Diamond-Furr *Expansion Joint* trim (pt # **DFXS-375**) is designed to be used in a conventional 7/8" 3-coat plaster system in place of the #40, point-to-point expansion screed or slip joint style trims. The **DFXS-375** incorporates the moisture management design of our popular 'X-Slide' expansion joint with the added benefit of a built-in furring strip. The furring strip provides an uninterrupted 3/8" furring, a flexible connection point for tying on metal lath and eliminates 100% of the penetrations through the moisture barrier at termination points. The Diamond Furr X-Slide is also available with a sloped top flange.

Another advantage of the Diamond-Furr *X-Slide trim* is that it removes the need for additional petroleum based peel and stick moisture barrier products and guarantees a 7/8" plaster depth at the termination point resulting in reduced cracking.

We recommend using the Diamond-Furr Expansion Joint Trim in conjunction with our ICC approved (ESR-3232) Diamond-Furr *Furring Strips* for a complete system and the utmost protection against moisture intrusion.

MATERIAL: 26 GA Galvanized Steel G90, Also available in Stainless Steel – Call for Details
ASTM : A653, LFG, C1063, C841, C847, A653, C1047, A924, Fed. Spec QQ-S-775-D
LENGTH: Standard: 10 ft.

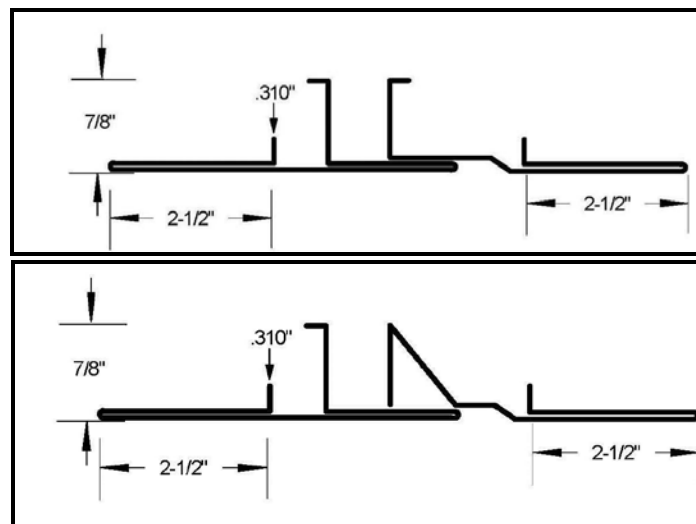

BRAND X METALS, INC.

1641 So. Sinclair Street ♦ Anaheim, CA 92806 ♦ PH: (714) 978-3600 ♦ FAX: (714) 978-3601


www.brandxmetals.com

DIAMOND<>FURR® Pat.

LATH ATTACHMENT SYSTEM

PRODUCT ID: DFXS-375

EXPANSION JOINT

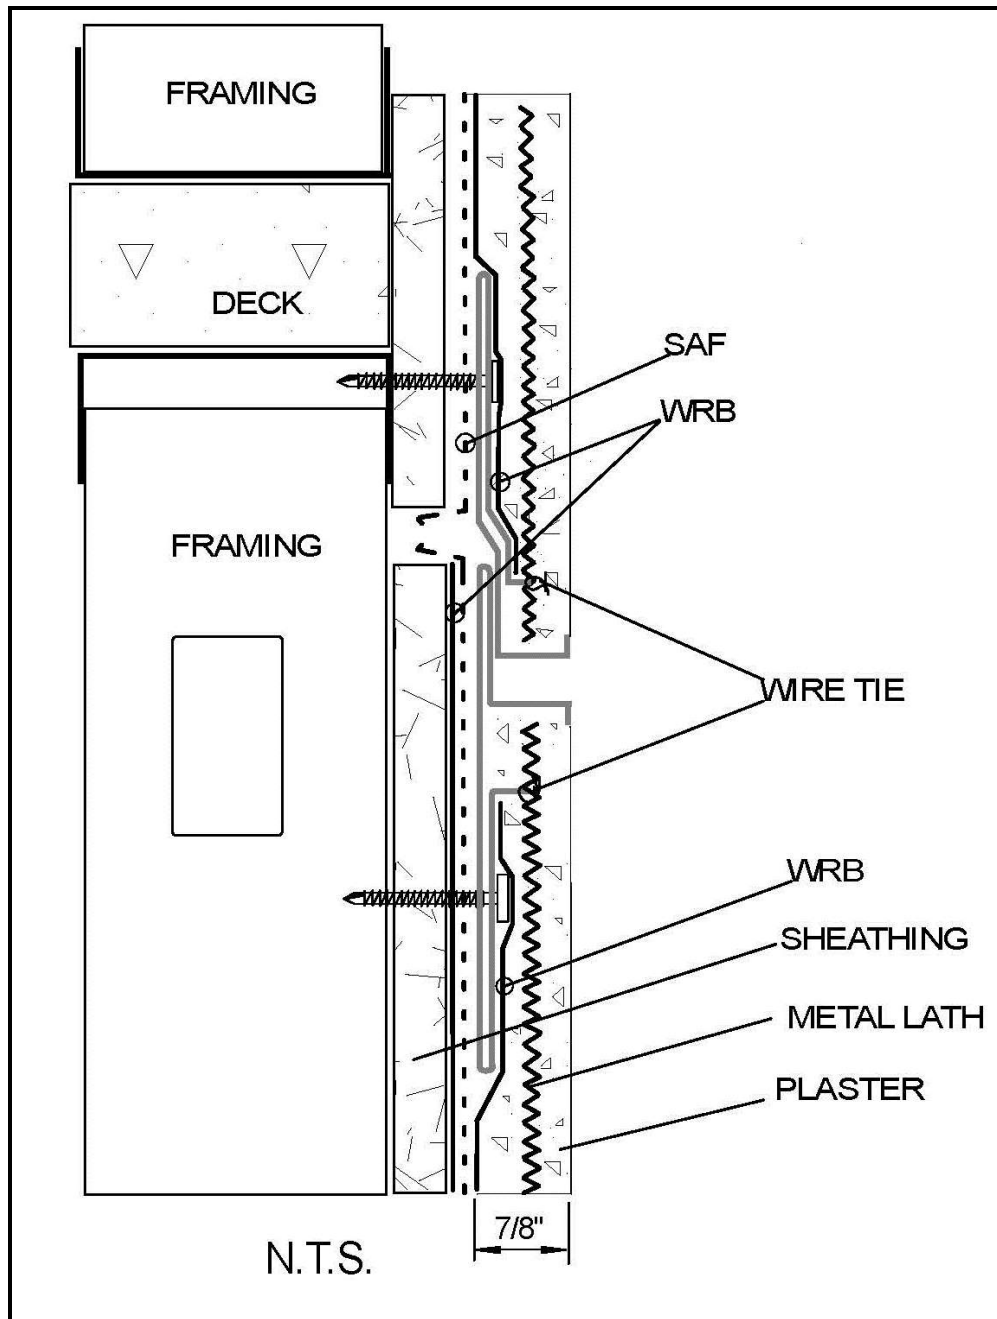

BRAND X METALS, INC.

1641 So. Sinclair Street ♦ Anaheim, CA 92806 ♦ PH: (714) 978-3600 ♦ FAX: (714) 978-3601

www.brandxmetals.com