




OFFSET POINT 2 POINT SCREED

PRODUCT ID: SOS

Compare to: OVS

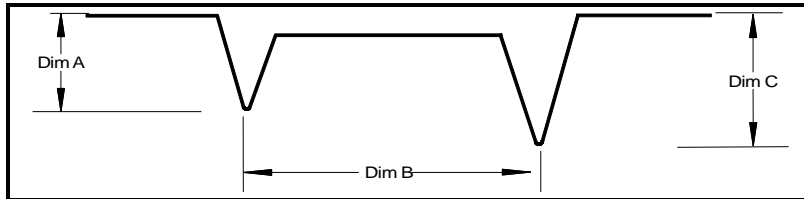

DESCRIPTION: Functional screed used to make the transition between two different height grounds while controlling stucco cracking.

MATERIAL / THICKNESS:

040 Aluminum, 26 GA Galvanized Steel, 26 GA Stainless Steel

ASTM:

A653, LFQ, C1063, B209, B69

LENGTH:

Standard: 10 ft.

TO ORDER:

DETERMINE THE FOLLOWING:

Ground Size (Dim A) and Reveal Width (Dim B)

Type of Material: Galvanized, Stainless, Anodized Aluminum

COMMON SIZES:

GROUND (DIM. A)	REVEAL SIZE (DIM. B)	GROUND DIM. C)
3/8"	3/4"	3/8"
1/2"	1"	1/2"
5/8"	1-1/2"	5/8"
3/4"	2"	3/4"
7/8"	2-1/2"	7/8"
1"	3"	1"
1-1/4"	3-1/2"	1-1/4"
1-1/2"		1-1/2"

Custom sizes available.

BRAND X METALS, INC.

1641 So. Sinclair St. ♦ Anaheim, CA 92806 ♦ PH: 714-978-3600 ♦ FAX: 714-978-3601

www.brandxmetals.com