



## DRYWALL 'F' REVEALS

**PRODUCT ID: DRF**

Compare to: DRMF, SWR-U

**DESCRIPTION:** Industry standard Drywall 'F' Reveal with tapered nail flange is used when a reveal is needed against a sill, jamb, ceiling or other finish material. The tapered nail flanged is designed for applying tape and joint compound for a clean finish. Brand X Metals' drywall trims have a Design Advantage with our exclusive Breakaway Flanges. Designed to allow installers to quickly (10 seconds) remove a nailing flanged to create a smooth transition intersection using standard hand tools.



**MATERIAL:** Aluminum Alloy 6063 T5 **THICKNESS:** Nominal .050 **ASTM:** B 221

**LENGTH:** Standard: 10 ft.

**FINISH:** Standard - Clear anodized; Architectural 200R1 Medium Etch AAM32C10A21  
Also available: 'Mill finish for field painting and custom anodized colors

**OPTIONS:** **Venting** - All channel screeds from 1/2" width to 4" are available with venting

**Radius** – Channel screeds can be curved to meet your required specifications

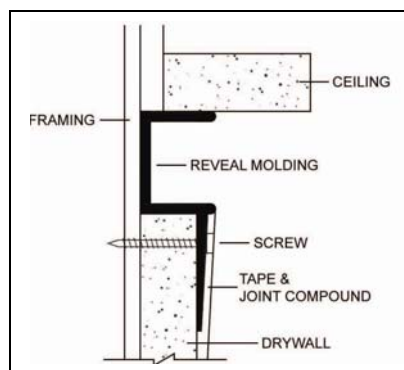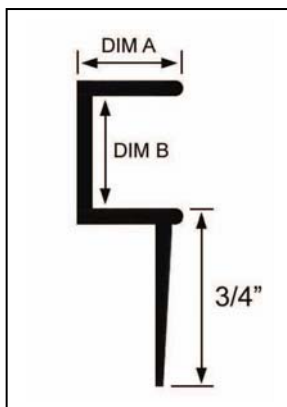

| Dim. A | Dim. B | Part #      |
|--------|--------|-------------|
| 1/2"   | 1/4"   | DRF 50-25   |
| 1/2"   | 1/2"   | DRF 50-50   |
| 1/2"   | 3/4"   | DRF 50-75   |
| 1/2"   | 2"     | DRF 50-200  |
| 5/8"   | 1/4"   | DRF 625-25  |
| 5/8"   | 3/8"   | DRF 625-375 |
| 5/8"   | 1/2"   | DRF625-50   |
| 5/8"   | 3/4"   | DRF 625-75  |
| 5/8"   | 1"     | DRF 625-100 |
| 5/8"   | 1-1/2" | DRF 625-150 |
| 5/8"   | 2"     | DRF 625-200 |
| 5/8"   | 3"     | DRF 625-300 |

**BRAND X METALS, INC.**

1641 S. Sinclair St. ♦ Anaheim, CA 92806 ♦ PH: 714-978-3600 ♦ FAX: 714-978-3601

[www.brandxmetals.com](http://www.brandxmetals.com)