



DRYWALL 'F' REVEALS

PRODUCT ID: DRF

Compare to: DRMF, SWR-U

DESCRIPTION: Industry standard Drywall 'F' Reveal with tapered nail flange is used when a reveal is needed against a sill, jamb, ceiling or other finish material. The tapered nail flanged is designed for applying tape and joint compound for a clean finish. Brand X Metals' drywall trims have a Design Advantage with our exclusive Breakaway Flanges. Designed to allow installers to quickly (10 seconds) remove a nailing flanged to create a smooth transition intersection using standard hand tools.



MATERIAL: Aluminum Alloy 6063 T5 **THICKNESS:** Nominal .050 **ASTM:** B 221

LENGTH: Standard: 10 ft.

FINISH: Standard - Clear anodized; Architectural 200R1 Medium Etch AAM32C10A21
Also available: 'Mill finish for field painting and custom anodized colors

OPTIONS: **Venting** - All channel screeds from 1/2" width to 4" are available with venting

Radius – Channel screeds can be curved to meet your required specifications

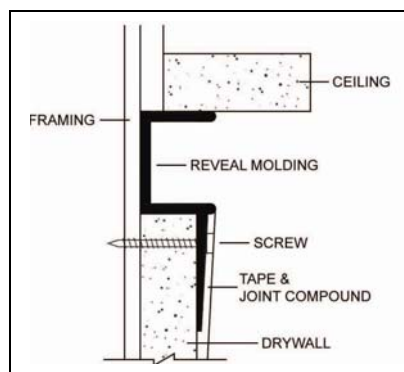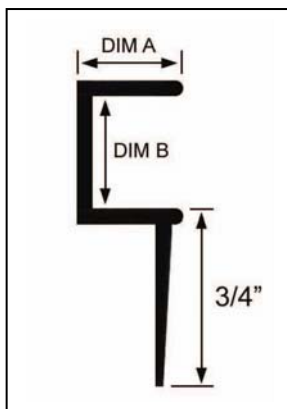

| Dim. A | Dim. B | Part # |
|--------|--------|-------------|
| 1/2" | 1/4" | DRF 50-25 |
| 1/2" | 1/2" | DRF 50-50 |
| 1/2" | 3/4" | DRF 50-75 |
| 1/2" | 2" | DRF 50-200 |
| 5/8" | 1/4" | DRF 625-25 |
| 5/8" | 3/8" | DRF 625-375 |
| 5/8" | 1/2" | DRF625-50 |
| 5/8" | 3/4" | DRF 625-75 |
| 5/8" | 1" | DRF 625-100 |
| 5/8" | 1-1/2" | DRF 625-150 |
| 5/8" | 2" | DRF 625-200 |
| 5/8" | 3" | DRF 625-300 |

BRAND X METALS, INC.

1641 S. Sinclair St. ♦ Anaheim, CA 92806 ♦ PH: 714-978-3600 ♦ FAX: 714-978-3601

www.brandxmetals.com